

HP 87405A Preamplifier

10 MHz to 3 GHz

Technical Data

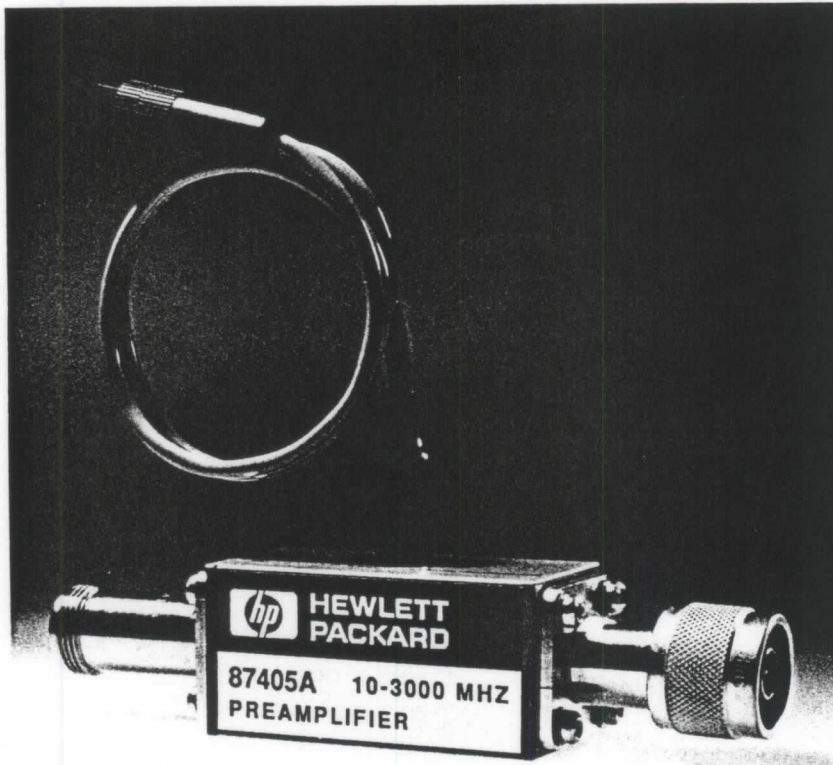

Features

- 24 dB Gain
- 6.5 dB Noise Figure
- Probe-Power Bias Connection
- Compact Size

The HP 87405A Preamplifier brings reliable gain and low noise figure to measurement systems to improve overall system performance and reduce systematic errors. With its compact size and convenient probe-power bias connection, the HP 87405A is ideal for use as the front end preamplifier for a variety of HP instruments such as the HP 8590E series of portable spectrum analyzers. The HP 87405A is the recommended preamplifier for use with the HP 8594E Noise Figure Measurement Solution. The rugged design along with its insertable configuration of connectors makes the HP 87405A ideal for test port applications.

Benchtop/General purpose use

Used alone on the bench, the HP 87405A can be added to any application in which additional gain and low noise are required. The compact and inexpensive HP 11899A Probe Power Supply is a suitable source of DC bias in remote applications.

Improve noise figure measurements

Add a preamplifier to noise figure measurement systems to significantly lower system noise figure. The noise figure of the system is dominated by the noise figure of the preamplifier.

$$F_{\text{new}} = F_{\text{pa}} + \frac{F_{\text{sys}} - 1}{G_{\text{pa}}}$$




Where F and G are noise figure and preamplifier gain, both in linear terms.

$$\text{NF}_{\text{sys}} = 10 \log(F_{\text{sys}}) \text{ in dB}$$

For systems having a single preamplifier, where the gain of the preamplifier is greater than or equal to the spectrum analyzer noise figure, the system noise figure approximately equals the noise figure of the preamplifier.


Increase sensitivity and speed

Adding preamplifiers to measurement systems can improve sensitivity for measuring low-level signals. Boost the sensitivity of your HP spectrum analyzer 15 to 25 dB by using the HP 87405A Preamplifier. Alternatively, better sensitivity can be traded for measurement speed. Spurious tests often require narrow resolution bandwidths to reduce the noise floor of the analyzer, allowing low-level signal detection. An analyzer with low noise figure allows you to use a wider resolution bandwidth, yet achieve the same sensitivity. Sweeptimes can improve 100 fold for each decade increase in bandwidth. The HP 87405A Preamplifier has gain and noise figure characteristics that optimize dynamic range and sensitivity.

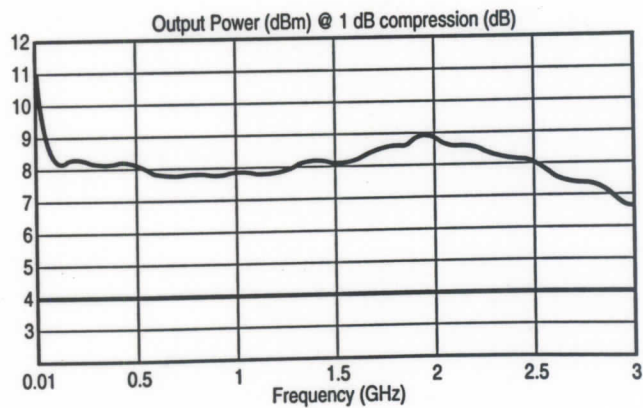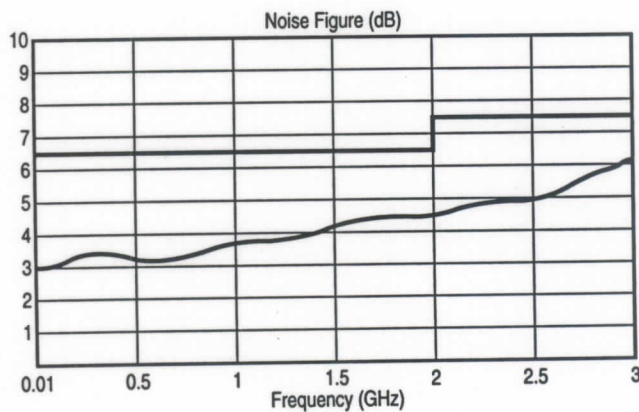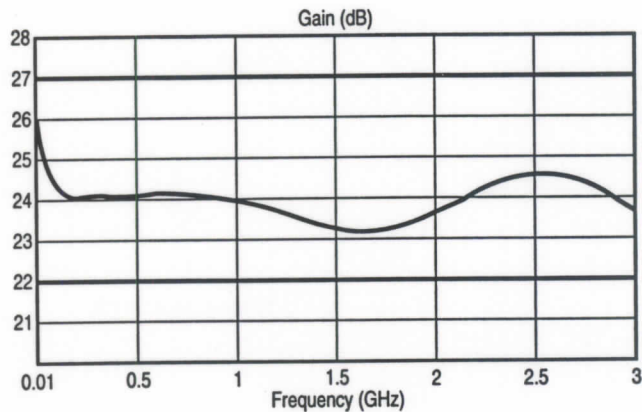

HP 87405A product specifications

Frequency Range	10-3000 MHz
Small Signal Gain	22-27 dB min-max
Gain Flatness	± 1.25 dB 50-3000 MHz ± 2.0 dB 10-3000 MHz
Output Power (1 dBc)	4 dBm
Noise Figure	6.5 dB 10-2000 MHz 7.5 dB 2000-3000 MHz
Third Order Intercept (TOI)	15 dBm typical
Harmonics (@ +4 dBm output power)	20 dBc typical
Input VSWR	1.5:1 10-1000 MHz 1.7:1 1000-2000 MHz 2.0:1 2000-2900 MHz 2.2:1 2900-3000 MHz
Output VSWR	2.0:1
Impedance	50 ohms nominal
Reverse Isolation	60 dB typical
Survival Input Power (max)	+13 dBm typical
Power Dissipation	1.2 W nominal
Temperature (operating)	0 to +55°C
(storage)	-40 to +70°C

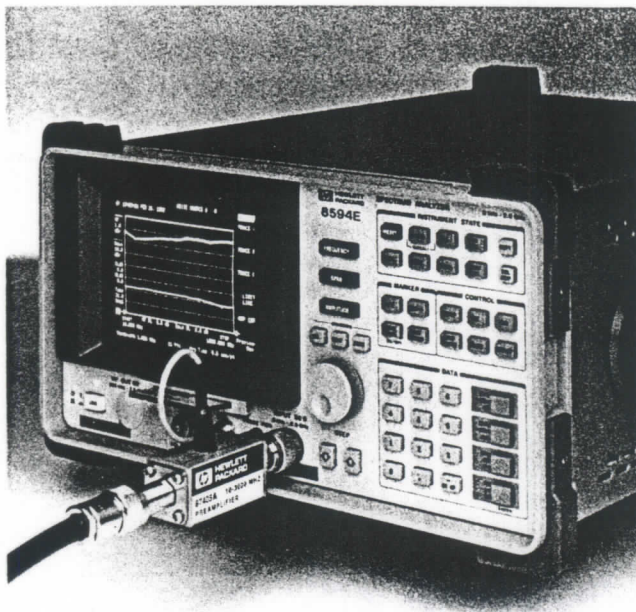

General specifications

Bias Voltage and Current	15 \pm 6% Vdc @ 80 mA nominal
Connectors	RF Type N(f) in, N(m) out DC Probe Power Connector (f)
Weight	net 270 g, shipping 510 g

Environmental information

EMC	IEC 801-2/1991 IEC 801-3/1984	IEC 801-4/1988 CISPR-11/1990
Moisture Resistance	65°C at 95% RH for 10 days per Mil-Std-883C method 1004.5	
Random Vibration	5.2 G (rms) to 2000 Hz per Mil-Std-883C method 2026-11A	
Shock	1500 G (peak), 0.5 ms per Mil-Std-883C method 2002.3-B	
Altitude, non-operating	15,000 meters per Mil-Std-883C method 1001-C.	

Specifications describe the instrument's warranted performance over the temperature range 0°C to +55°C (unless otherwise noted). All specifications apply after the instrument's temperature has been stabilized after one hour continuous operation. Typical characteristics are intended to provide information useful in applying the instrument by giving typical but nonwarranted performance parameters. These are denoted as "typical" or "nominal" and apply over the temperature range 0°C to +55°C.

Caution: Electrostatic Discharge (ESD) can damage or destroy electronic components. It is recommended that this preamplifier, like other electronic components, be installed and operated at a static-free workstation or in an environment where precautions against ESD have been implemented.

Ordering information

HP 87405A Preamplifier 10 MHz to 3 GHz


HP 11899A Probe Power Supply
(*must order one option*)

Option 100	100 V operation
Option 120	120 V operation
Option 220	220 V operation
Option 240	240 V operation

Support literature

HP 8590E Series Technical Data Sheet, HP lit. no. 5091-3271E

HP 11899A Technical Data Sheet, HP lit. no. 5091-0754E

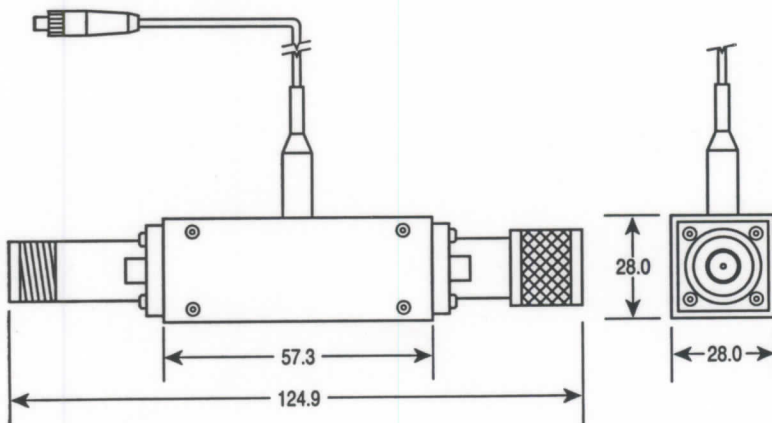Application Note 57-2,
"Noise Figure Measurement Accuracy," HP lit. no. 5952-3706

For more information, call your
local HP sales office listed in your
telephone directory.

Data Subject to Change
Copyright © 1992
Hewlett-Packard Company
Printed in U.S.A. 4/92
5091-3661E